
www.check-flex.eu www.check-flex.co.uk



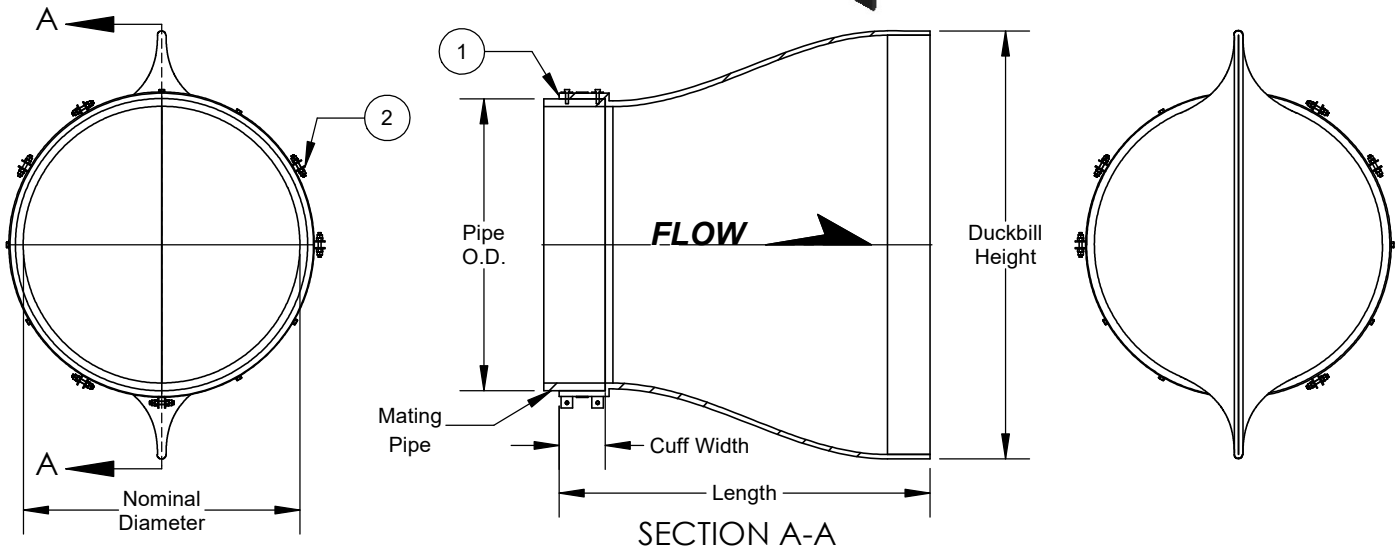

SECTION A-A

Bill of Materials		
Item No.	Description	Material
1	Check-Flex CF-G3-S1800	NN
2	External Clamp	316 SS


Notes:

1. Dimensions are approximate and may change due to pipe dimension, inlet pressure, back pressure and flow rates.
2. Installation, Operation & Maintenance Manuals contact Check-Flex®: info@check-flex.eu
3. Elastomer: Neoprene to ASTM D2000: 5BC520 A14 C12 Eo34 G21 Z1 Z1= flame resistance per ASTM C1166

Meets and exceeds: D412 modulus (300%) D573 heat age test D1171 ozone resistance

Nominal Diameter	Qty.	PIPE O.D.	Standard Valve Dimensions			Flow Data					Approx. Weight
			Cuff Width	Length	Duckbill Height	Flow Media	Max. Flow Rate	Max. Flow Velocity	Line Pessure	Back Pessure	
mm			mm	mm	mm						kgs
1800			305	2452	2830						861.9

1800 mm - Check-Flex® Duckbill CF-G3-S1800
Headloss (mm) vs. Flow (l/s)

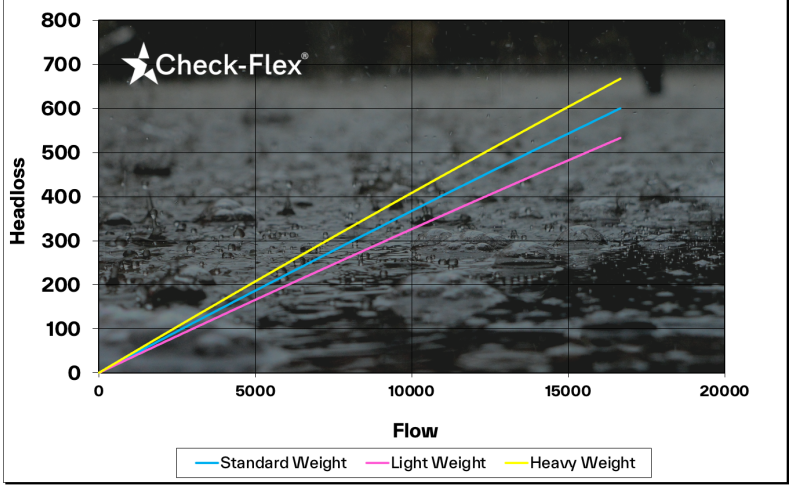

Check-Flex® G3-S1800 Duckbill Check Valve

Check-Flex®

Check-Flex G3-S1800

PROJECT NOTES:

PROJECT NAME:

CUSTOMER:

SIZE	SCALE	DRAWING No.	SHEET
A	NTS	CF-G3-S1800	1 OF 1