

www.check-flex.eu www.check-flex.co.uk

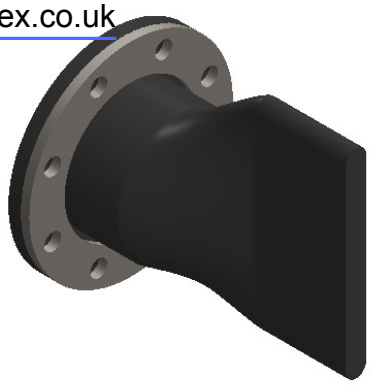

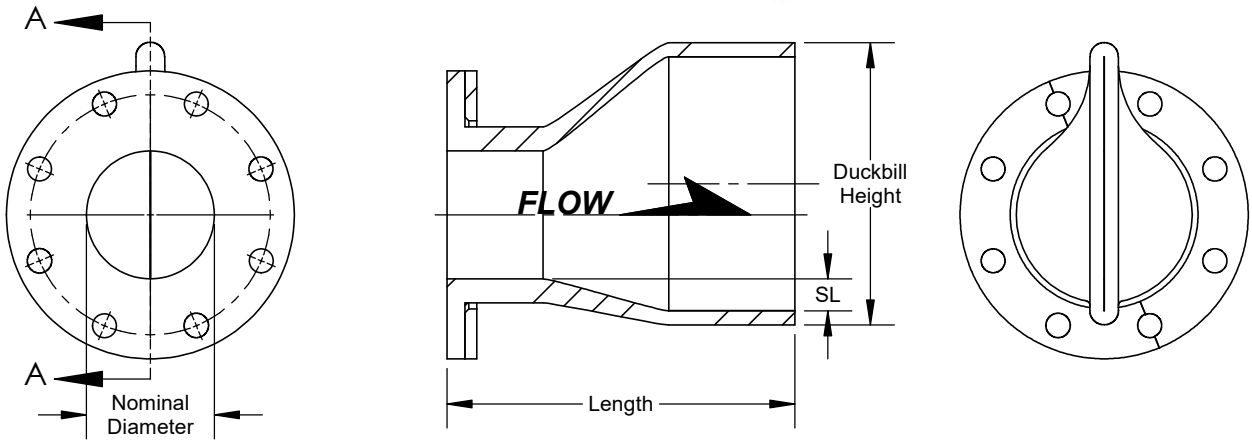

SECTION A-A

Bill of Materials

Item No.	Description	Material
1	CheckFlex G4-F0250	NN
2	Split Retaining Ring	316 SS


Notes:

1. Dimensions are approximate and may change due to pipe dimension, inlet pressure, back pressure and flow rates.
2. Installation, Operation & Maintenance Manuals contact Check-Flex®: info@check-flex.eu
3. Elastomer: Neoprene to ASTM D2000: 5BC520 A14 C12 Eo34 G21 Z1 Z1= flame resistance per ASTM C1166

Meets and exceeds: D412 modulus (300%) D573 heat age test D1171 ozone resistance

Nominal Diameter	Qty.	Flange Drilling Specification	Standard Valve Dimensions			Flow Data					Approx. Weight
			Length	Duckbill Height	SL	Flow Media	Max. Flow Rate	Max. Flow Velocity	Line Pessure	Back Pessure	
mm			mm	mm	mm						kgs
250		DIN PN16	21.8 (554)	20.5 (520)	2.0 (50)						24

250 mm - *Check-Flex® Duckbill CF-G4-S0250*
Headloss (mm) vs. Flow (l/s)

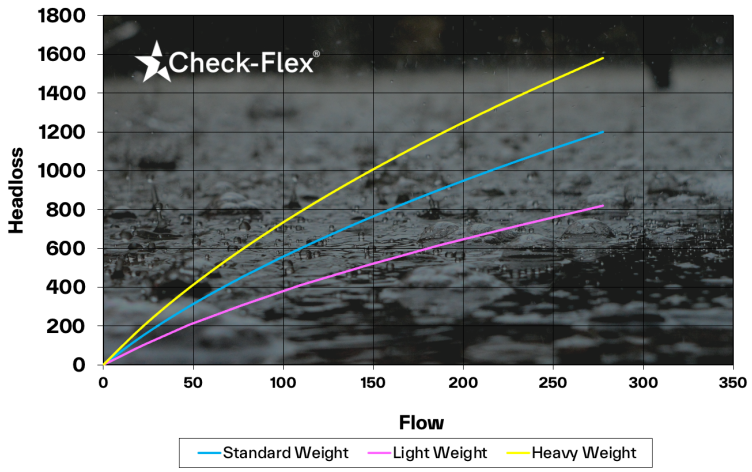

Check-Flex® G4-F0250 Duckbill Check Valve

Check-Flex®

Check-Flex G4-F0250

PROJECT NOTES:

PROJECT NAME:

CUSTOMER:

SIZE	SCALE	DRAWING No.	SHEET
A	NTS	CF-G4-F0250	1 OF 1