

www.check-flex.eu www.check-flex.co.uk

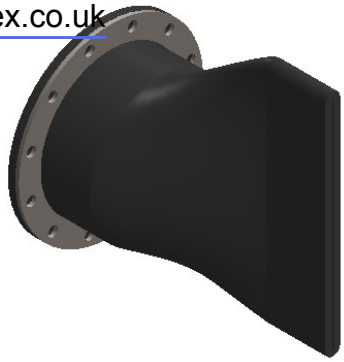

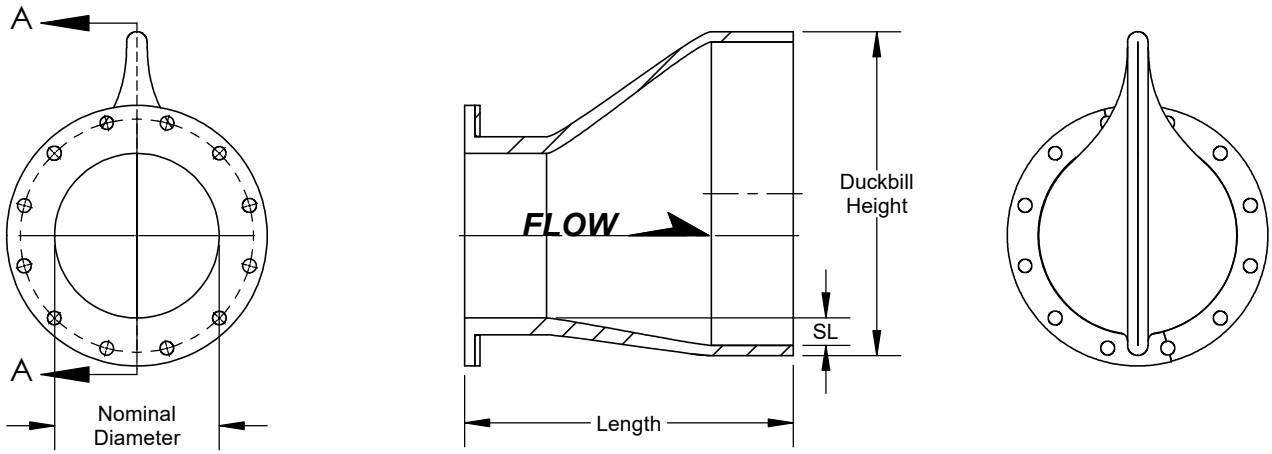


SECTION A-A

| Bill of Materials | | |
|---|---|---|
| Item No. | Description | Material |
| 1 | Check-Flex CF-G4-F0450 | NN |
| 2 | Split Retaining Ring | 316 SS |


Notes:

1. Dimensions are approximate and may change due to pipe dimension, inlet pressure, back pressure and flow rates.
2. Installation, Operation & Maintenance Manuals contact Check-Flex®: info@check-flex.eu
3. Elastomer: Neoprene to ASTM D2000: 5BC520 A14 C12 Eo34 G21 Z1 Z1= flame resistance per ASTM C1166

Meets and exceeds: D412 modulus (300%) D573 heat age test D1171 ozone resistance

| Nominal Diameter | Qty. | Flange Drilling Specification | Standard Valve Dimensions | | | Flow Data | | | | | Approx. Weight |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Length | Duckbill Height | SL | Flow Media | Max. Flow Rate | Max. Flow Velocity | Line Pessure | Back Pessure | |
| mm | | | mm | mm | mm | | | | | | kgs |
| 450 | | DIN PN16 | 760 | 838 | 50 | | | | | | 61 |

***450 mm - Check-Flex® Duckbill CF-G4-S0450***
***Headloss (mm) vs. Flow (l/s)***

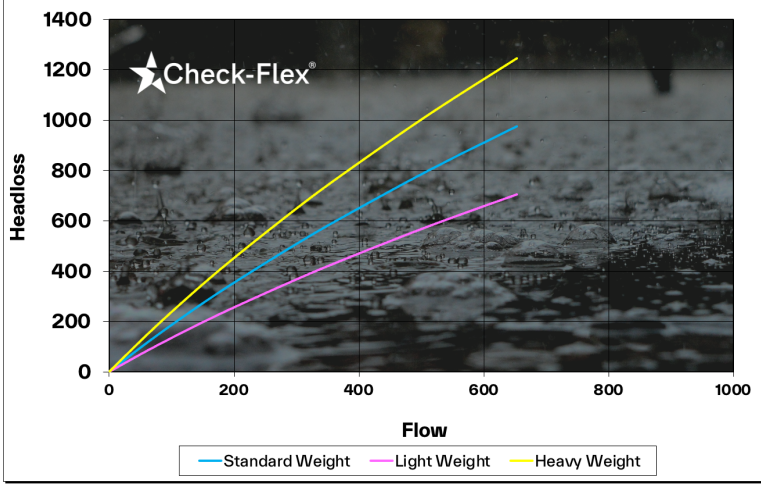


Check-Flex® G4-F0450 Duckbill Check Valve

Check-Flex®

Check-Flex G4-F0450

PROJECT NOTES:

PROJECT NAME:

CUSTOMER:

| SIZE | SCALE | DRAWING No. | SHEET |
|---|---|---|---|
| A | NTS | CF-G4-F0450 | 1 OF 1 |