


REVISIONS		
REV.	DESCRIPTION	DATE
A	Initial Release	10/10/2024

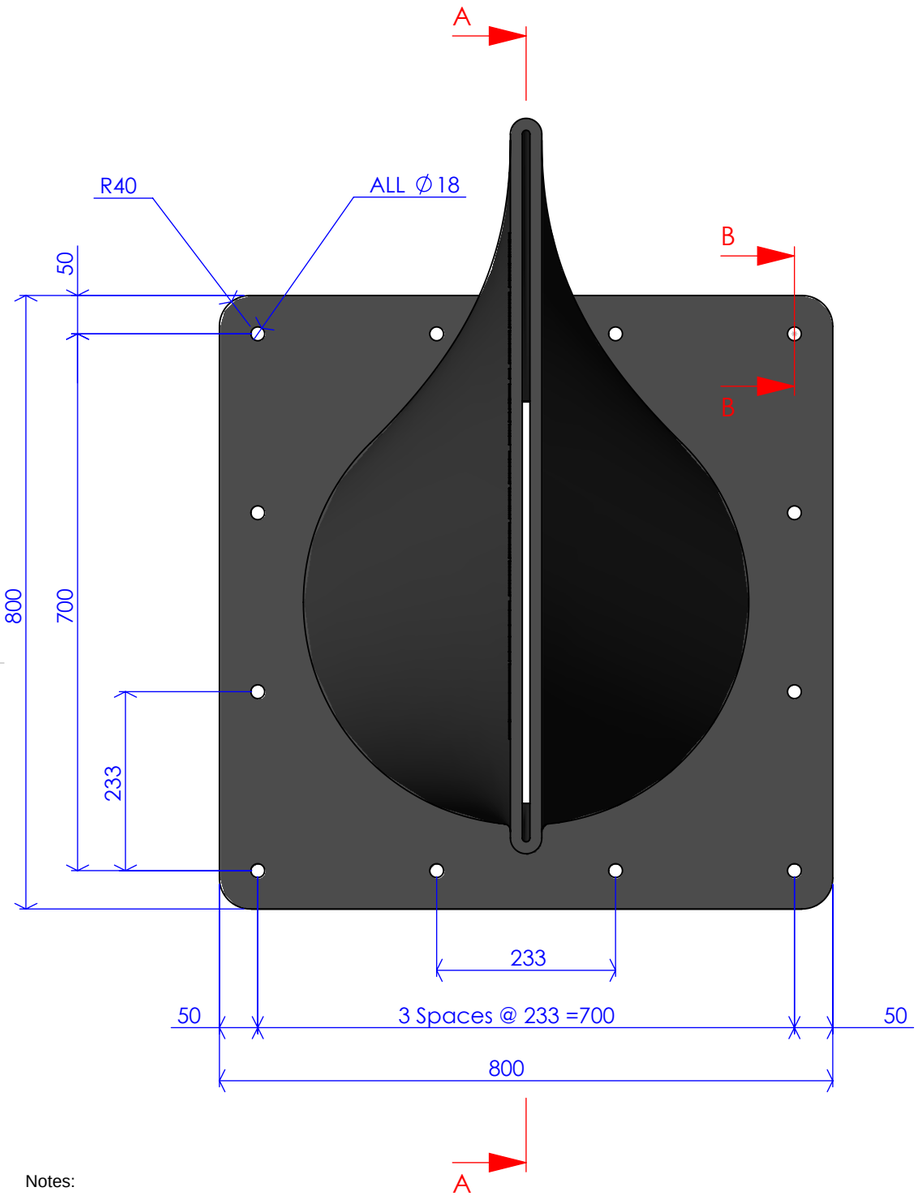

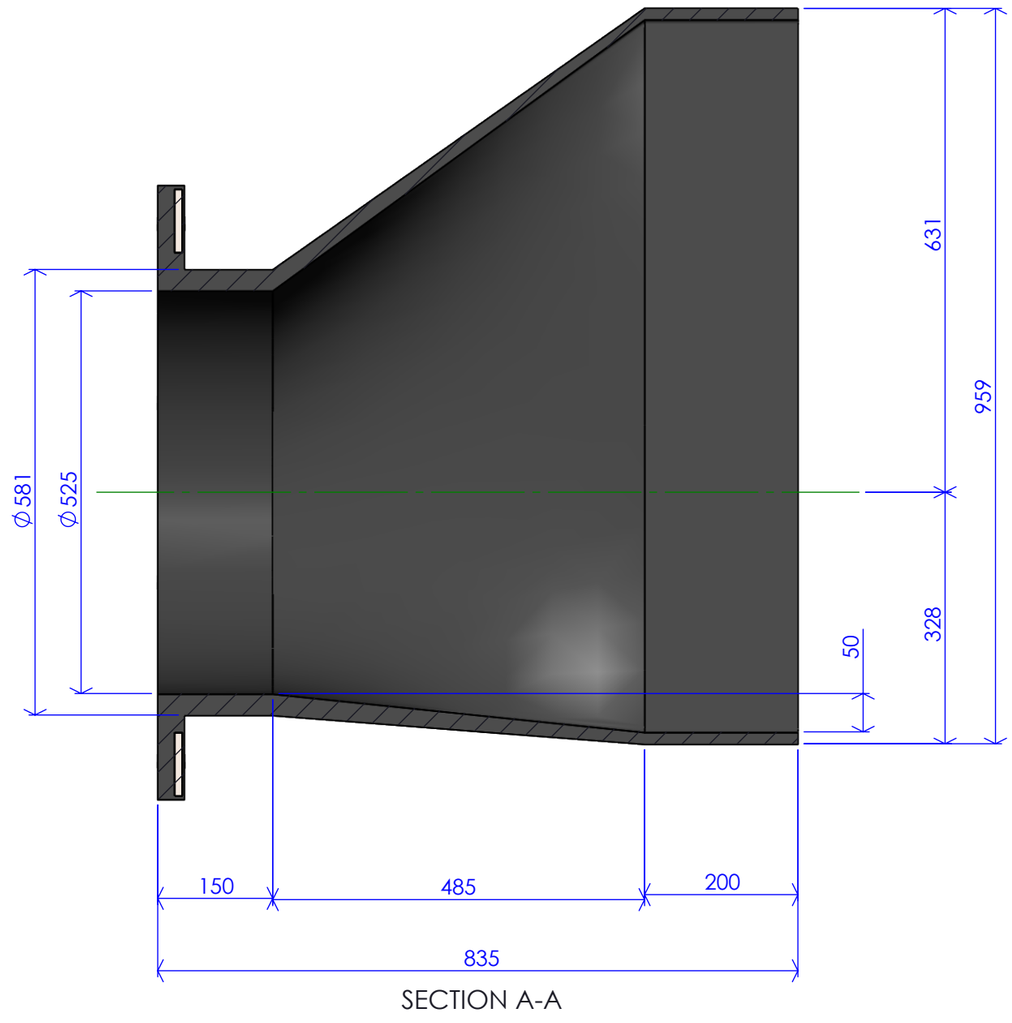

SECTION A-A

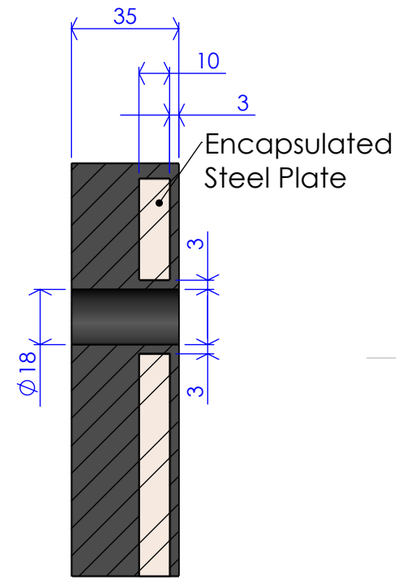

SECTION B-B
SCALE 1 : 2

Notes:

1. Dimensions are approximate and may change due to pipe dimension, inlet pressure, back

pressure and flow rates.

2. Installation, Operation & Maintenance Manuals contact Check-Flex®: info@ check-flex.eu

3. Elastomer: Neoprene to ASTM D2000: 5BC520 A14 C12 Eo34 G21 Z1 Z1= flame

resistance per ASTM C1166

Meets and exceeds: D412 modulus (300%) D573 heat age test D1171 ozone resistance

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

	NAME	DATE
DRAWN	P Cullen	10 OCT 2024
CHK'D	P Cullen	10 OCT 2024
COMMENTS		

Material:
Neoprene / Steel

Finish:
Self Colour

Check-Flex®

TITLE:


G4-W0525 Encapsulated Rubber Duckbill Valve

DWG NO. A3

REVISION A

DEBUR AND BREAK SHARP EDGES | WEIGHT: 160 KG | DO NOT SCALE DRAWING | SHEET 1 OF 2



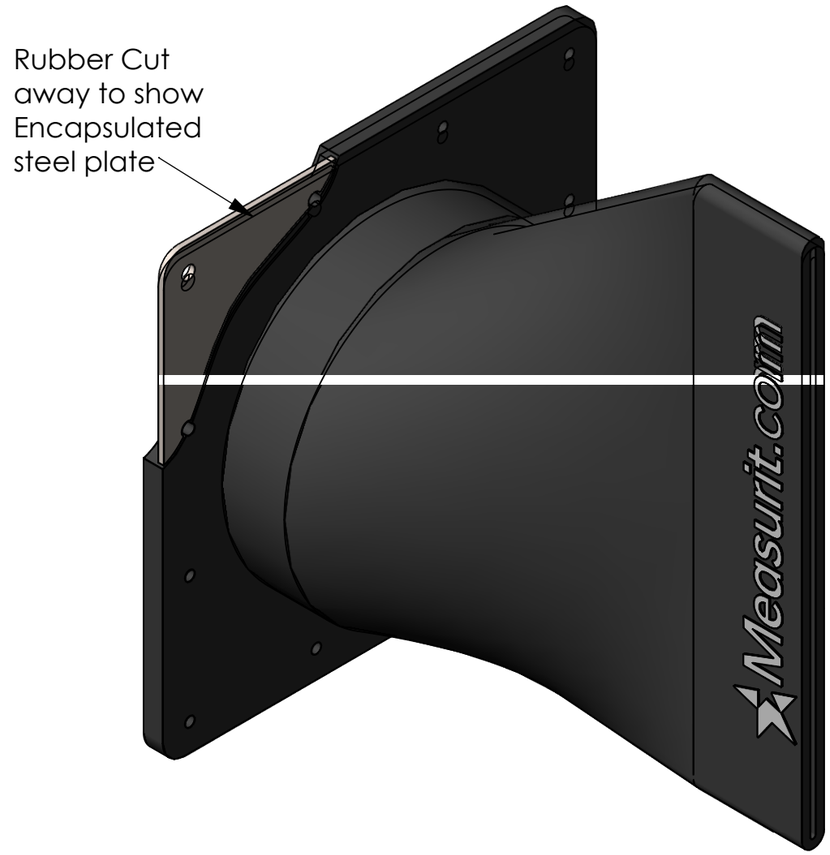

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

	NAME	DATE
DRAWN	P Cullen	10 OCT 2024
CHK'D	P Cullen	10 OCT 2024

COMMENTS

www.measurit.com
email: info@measurit.com
Phone: +353 1 484 7832 /
+44 20 3946 3242

Material:
Neoprene / Steel

Finish:
Self Colour

Measurit.com

TITLE:
500mm Check-Flex Square
Flanged Duckbill Valve Gen 4

DWG NO.
CF-DBF-SQ-G4-S0500-NN-ENC-F

A3

REVISION
A

DEBUR AND BREAK SHARP EDGES

WEIGHT: 160 KG

DO NOT SCALE DRAWING

SHEET 2 OF 2